



Digital Door-Guard is a feature rich Electronic Article Surveillance system that operates with all 58Khz acousto-magnetic tags and labels at a stable distance. Its slim, acrylic design and exit frame mounting method gives the system an aesthetically pleasing appearance with minimal obstruction.


Door-Guard's acrylic composition provides a very stylish appearance that accommodates the needs of fashionable retailers.

Door-Guard can detect pencil tags at 1 meter from either side. With Multi-Door-Guard pencil tags can be detected at a 1.8 meters range. Optional EASNet provides a convenient and powerful software interface (LAN and Internet) for a variety of controls and data mining features.

Fully compatible with all acousto-magnetic tags and labels .

High-Fashion design and acrylic composition for a most stylish appearance.

EXCELLENT SOLUTION WHERE EXIT SPACE IS AT A PREMIUM

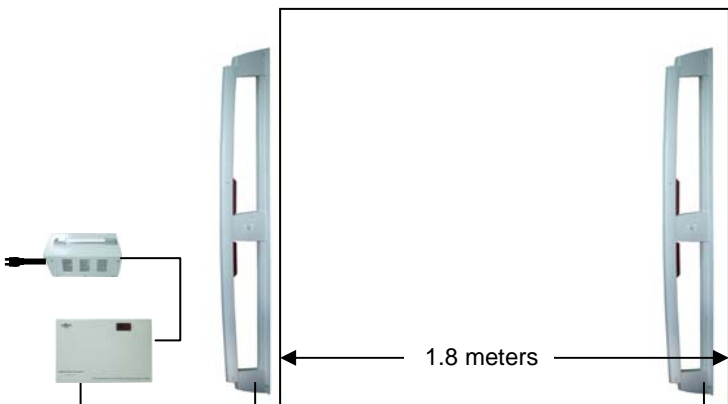

Digital Signal Processing


Door-Guard applies the latest and most advanced DSP technology for anti-theft solutions, virtually eliminating false alarms while maintaining considerable detection range. Benefiting from its fully digital electronics, Door-Guard constantly evaluates its environment, automatically adapting to changes in its environment to enhance its performance.

Integrated Audible & Visual Notification

Alarm notification is built into the Door-Guard on both the antenna and controller.

LAN Accessible

Door-Guard includes remote access capability via the optional EASNet Management & Analysis software package. EASNet facilitates a variety of remote control and data mining features.

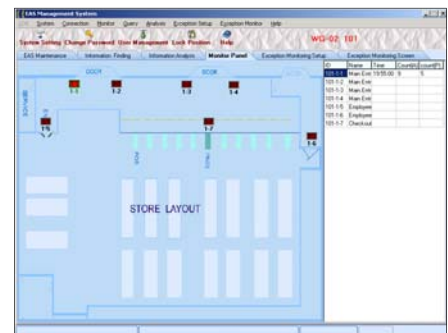

EASNet™ Software Compatible

- ◆ User Friendly Interface
- ◆ Dynamic Updates of Status and Activity
- ◆ Event Notification
- ◆ Report Queries
- ◆ Smart Detection
- ◆ Customize Your Store Layout

Single Door-Guard Specifications

	Europe	USA
Operating Frequency	58Khz	58Khz
Micro Pencil Tag Detection	1 m	3 ft
Operating Temperature	0° to 49°C	32° to 120°F
Height	1500mm	59"
Width	240mm	9.4"
Thickness	40mm	1.6"
Weight	4.5Kg	10lbs
Power	220-240vac	110-120vac

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE